

# Datasheet

## CEDD® Taxiway Centerline Light: Type TCL and TCC

## General

CEDD<sup>®</sup> is a smart, safe and sustainable airfield ground lighting technology. Energy and data transport are combined in a single cable. CEDD<sup>®</sup> airfield lights receive their power and data by means of induction and can therefore easily and safely be installed or replaced without making electrical contact.

With up to 40% lower energy consumption compared to regular LED AGL systems, CEDD<sup>®</sup> enables airfields to reduce their impact on the environment. Also, the robust design of the infrastructure is highly suitable for floating 'Follow-the-Greens'. CEDD<sup>®</sup> AGL provides a solution to face the most challenging future operational demands.

Most of the TKH Airport Solutions inset fixtures are available for regular 6.6-A LED AGL as well as for CEDD<sup>®</sup> AGL installations. This datasheet covers the specifications of the CEDD<sup>®</sup> Taxiway Centerline Light: Type TCL and TCC.

## Key Features


- 8" outer diameter
- Dust and water resistance: IP68
- Useful lamp life (LED) up to 50,000 hours
- Certification: ICAO
- Power consumption (CEDD<sup>®</sup> regulated):  
TCL: 8 W (G); 7 W (Y); 12 W (G-G, G-Y, Y-Y);  
TCC: 5 W (G, Y); 7 W (G-G); 8 W (G-Y, Y-Y)
- Ambient temperature: -40 °C (-40 °F) / + 75 °C (+167 °F)
- Internal serial interface for diagnostics and parameterization
- Integrated single lamp control
- Intensity control: 0-100%
- Optional sapphire-coated prism

Photometric data in this datasheet (such as light distributions and chromaticities) is based on ICAO certification. FAA data, if applicable, is available upon request. Contact our sales team for more information.


## Variants

- Taxiway Centerline Light straight: Unidirectional or Bidirectional
- Taxiway Centerline Light curved: Unidirectional or Bidirectional


Bidirectional  
Straight



Bidirectional  
Curved left






Bidirectional  
Curved right




# Light distributions

## Green, Taxiway Centerline Light

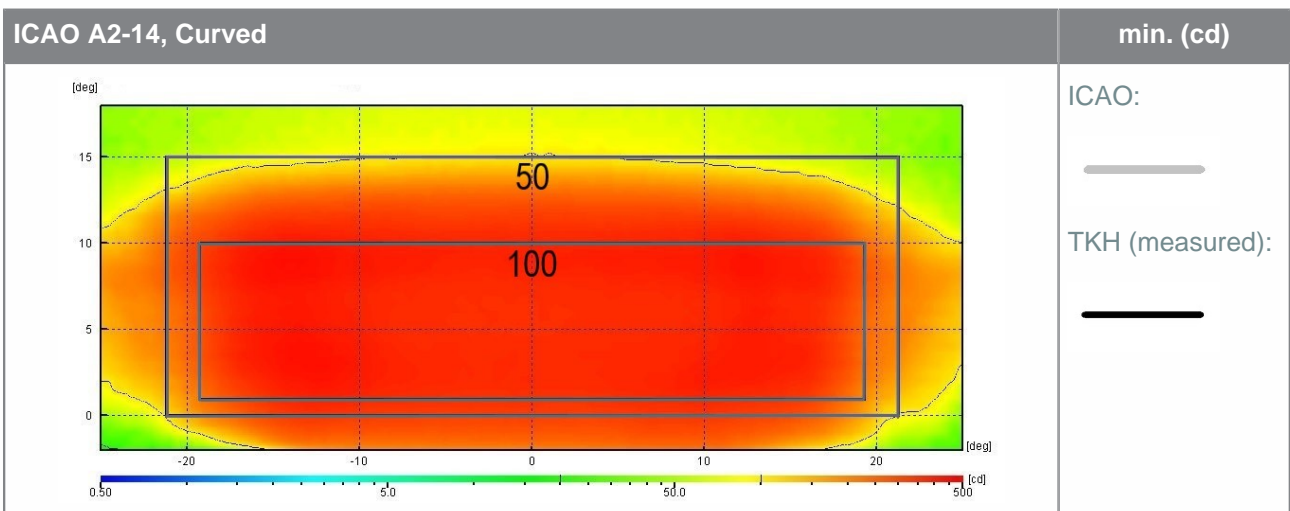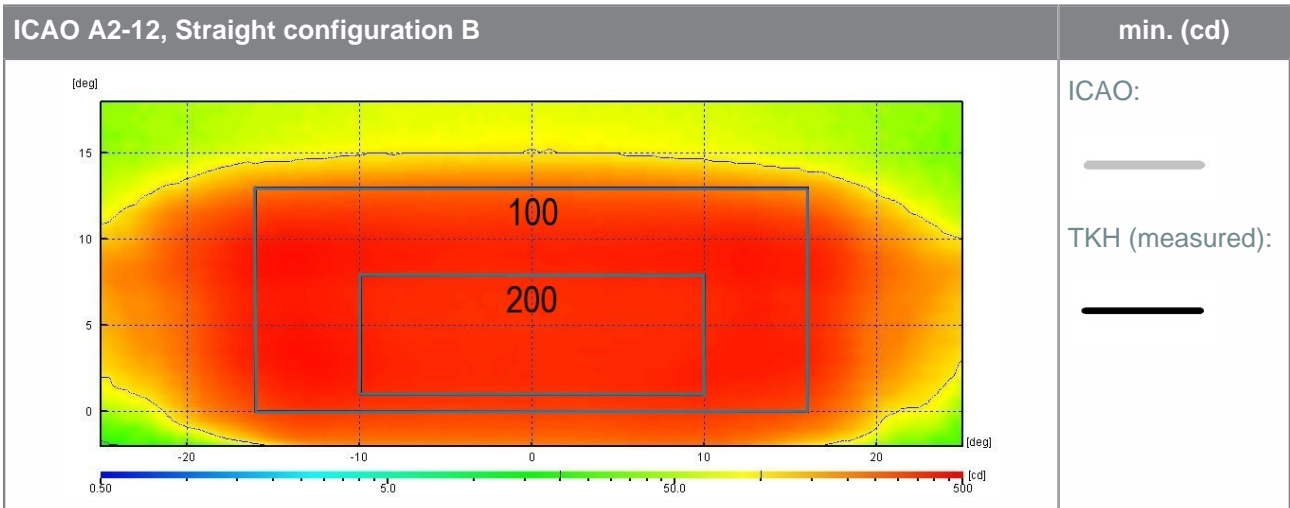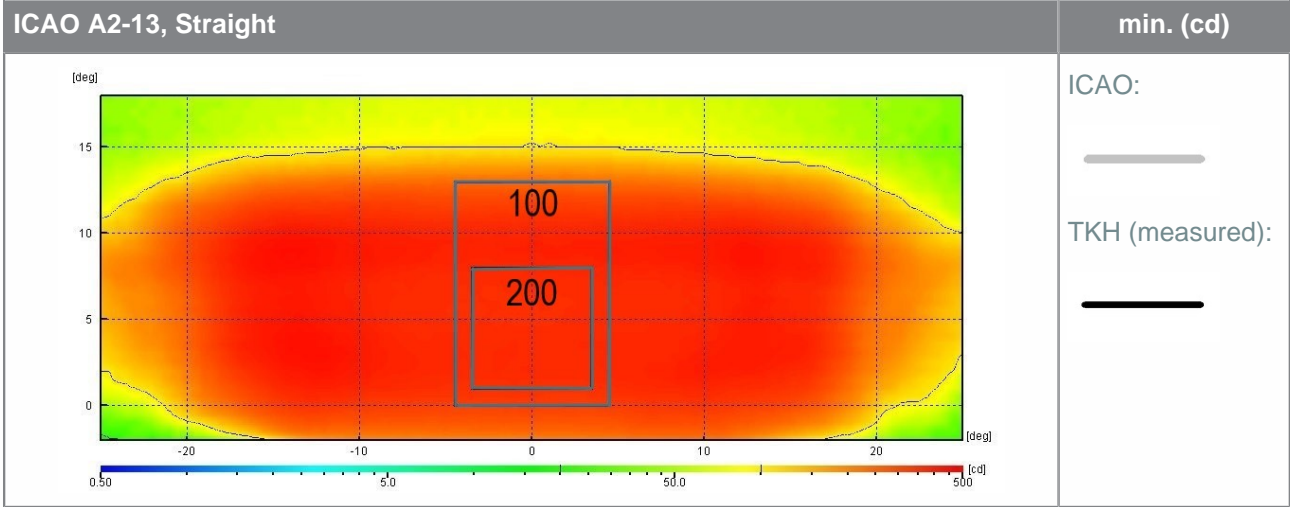

## Yellow, Taxiway Centerline Light

### ICAO A2-13, Straight

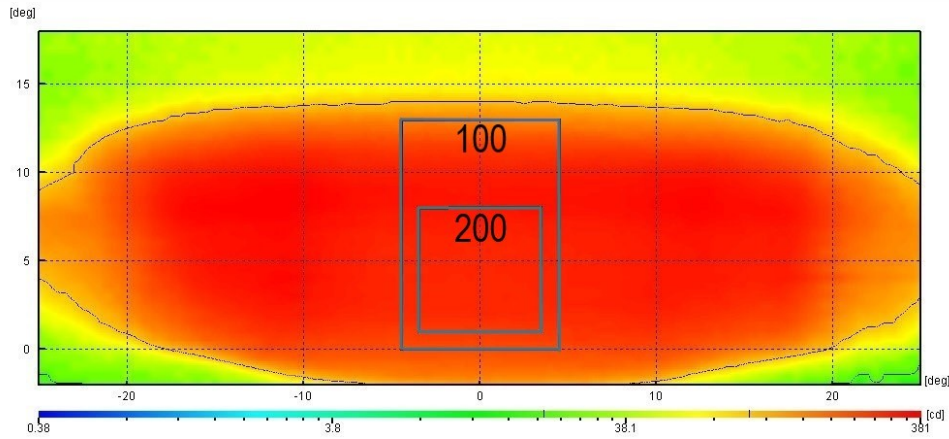

min. (cd)


ICAO:



TKH (measured):



### ICAO A2-12, Straight, configuration B

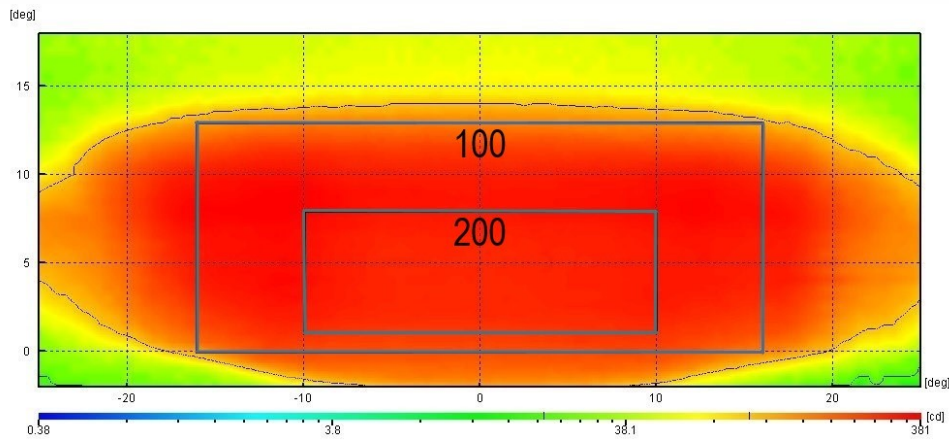

min. (cd)


ICAO:



TKH (measured):



### ICAO A2-14, Curved

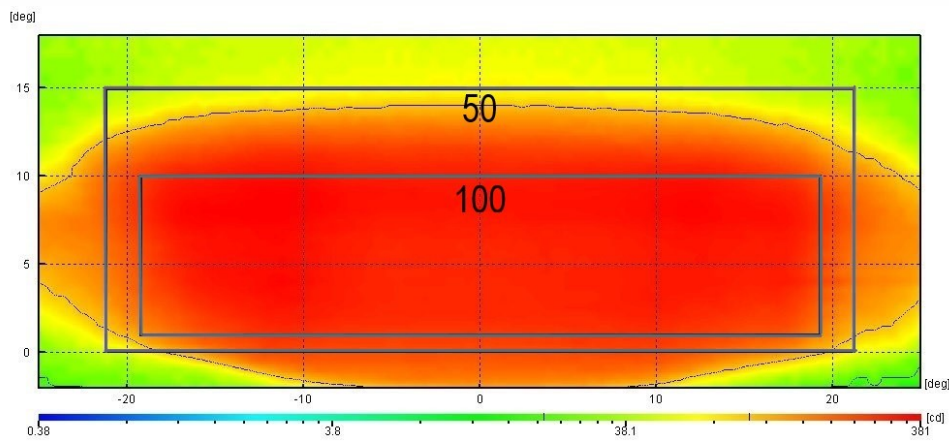

min. (cd)

ICAO:



TKH (measured):




## Colors

- Green
- Green / Green
- Yellow
- Green / Yellow
- Yellow / Yellow

## Chromaticities


Areas description according to ICAO Annex 14, Volume I, Edition 8, July 2018

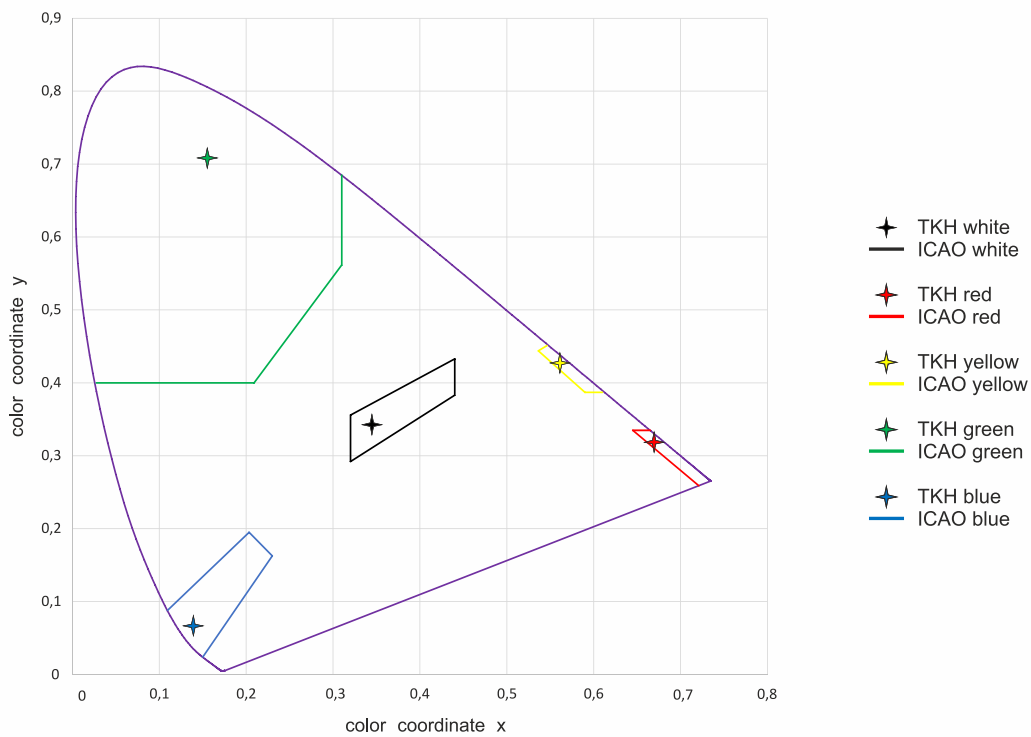


## Dimensions

### 8" fixture

Pos.	Description	Values
1	Total height	112 mm
2	Height LED engine	102.7 mm
3	Height with flange	86.7 mm
4	Height below flange	78.7 mm
5	Flange thickness	16 mm
6	Housing bottom width	111 mm
7	Housing top diameter	153 mm
8	Flange diameter	163.5 mm
9	Cover diameter	201.7 mm
10	Cable diameter	7.9 mm (max)
11	Housing bottom width	125 mm

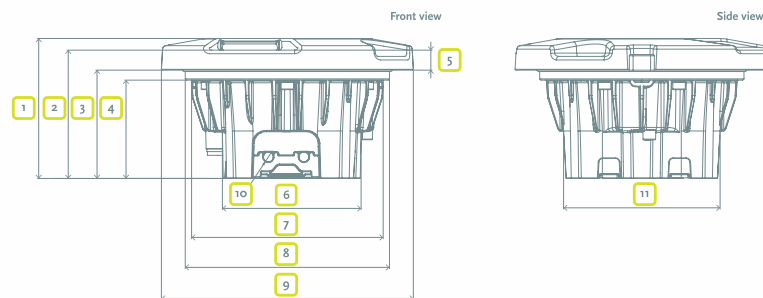

Pos.	Description	Values
12	Diameter of mounting bolt holes (2x)	Ø 10.5 mm
13	Diameter of pilot holes (2x)	Ø 10.5 mm
14	Mounting hole center line	184 mm

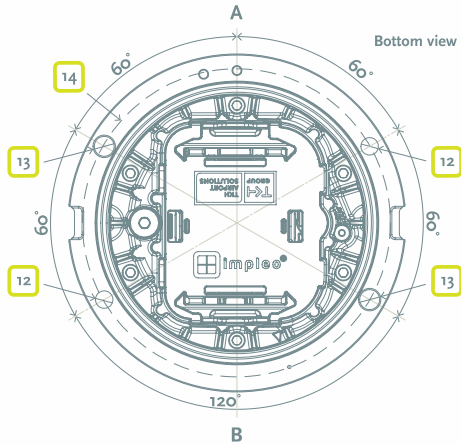

## Accessories

- 8" shallow base
- Shallow base installation jig for 8" and 12"

## Packing Data

Variant	Dimensions (L x W x H) in mm	Gross weight in kg	Net weight in kg
8" CEDD® Inset Fixture	285 x 285 x 200	4.2	3.7
8" Shallow Base	215 x 215 x 130	2.7	2.5

# Ordering code CEDD® TCL & TCC

Option	Key	Description	TCL	-	S	-	I	-	3	1	-	Y	00	0	00	-	1	-	00	-	0	0	0	0
<b>Version</b>	TCL	Taxiway Centerline Light																						
	TCC	Taxiway Centerline Curved Light																						
<b>Direction</b>	S	Straight																						
	L	Left Direction																						
	R	Right Direction																						
<b>Regulation</b>	I	ICAO																						
<b>Light Intensity</b>	1	CAT I																						
	2	CAT II																						
	3	CAT III																						
<b>Cover/Size</b>	1	8 Inch Cover																						
	3	8 Inch Flat Cover																						
<b>Color A</b>	B	Blue																						
	G	Green																						
	R	Red																						
	Y	Yellow																						
	A	Amber																						
<b>Toe-in A</b>	00	No Toe-In																						
<b>Color B</b>	B	Blue																						
	G	Green																						
	R	Red																						
	Y	Yellow																						
	A	Amber																						
	0	Blank																						
<b>Toe-in B</b>	00	No Toe-In																						
<b>Prism</b>	1	Borosilicate Prism																						
	2	Sapphire Prism																						
<b>Cable</b>	00	Not applicable (CEDD® technology)																						
<b>Plug type</b>	0	CEDD® inductive clamp																						
<b>Fail-open</b>	0	Functionality via CEDD® monitoring technology																						
<b>Deicing-Kit</b>	0	Not applicable																						
<b>Special options</b>	0	No Special Options																						





## Document Information

Name : 04\_CEDD\_Taxiway\_Centerline\_Light\_TCL\_TCC\_03-70040

Version : V1.1

Language : English (Original)

For the latest version of this document see <https://www.tkh-airportsolutions.com/airfield-products/> or scan:





### Company profile:

TKH Airport Solutions is an innovator in airfield ground lighting, offering a complete range of LED AGL products. We build upon the know-how from a long and successful tradition of pioneering developments in the AGL and connectivity industry. Being part of the TKH Group, our company can build on a history of more than 90 years in smart connectivity, energy distribution and AGL.

#### More information:

TKH Airport Solutions  
sales@tkh-airportsolutions.com  
www.tkh-airportsolutions.com  
+31 (0)53 57 414 56

#### Visiting address:

Elektrostraat 17  
7483 PG Haaksbergen  
The Netherlands