

Datasheet

Rapid Exit Taxiway Light (RETL800)

General

CEDD® is a smart, safe and sustainable airfield ground lighting technology. Energy and data transport are combined in a single cable. CEDD® airfield lights receive their power and data by means of induction and can therefore easily and safely be installed or replaced without making electrical contact.

With up to 40% lower energy consumption compared to regular LED AGL systems, CEDD® enables airfields to reduce their impact on the environment. Also, the robust design of the infrastructure is highly suitable for floating 'Follow-the-Greens'. CEDD® AGL provides a solution to face the most challenging future operational demands.

Most of the TKH Airport Solutions inset fixtures are available for regular 6.6-A LED AGL as well as for CEDD® AGL installations. This datasheet covers the specifications of the Rapid Exit Taxiway Light (RETL800).

Key Features

- 8" outer diameter
- Dust and water resistance: IP68
- Useful lamp life (LED) up to 50,000 hours
- Certification: ICAO/EASA
- Power consumption (CEDD® regulated): Y: 17 W; G: 19 W
- Ambient temperature: -40 °C (-40 °F) / + 75 °C (+167 °F)
- Internal serial interface for diagnostics and parameterization
- Integrated single lamp control
- Intensity control: 0-100%
- Optional sapphire-coated prism

Photometric data in this datasheet (such as light distributions and chromaticities) is based on ICAO certification. FAA data, if applicable, is available upon request. Contact our sales team for more information.

Variants

- Unidirectional straight
- Unidirectional curved

Colors


- Yellow
- Green

Light Distributions

Yellow - straight

ICAO A2-12

min. (cd)

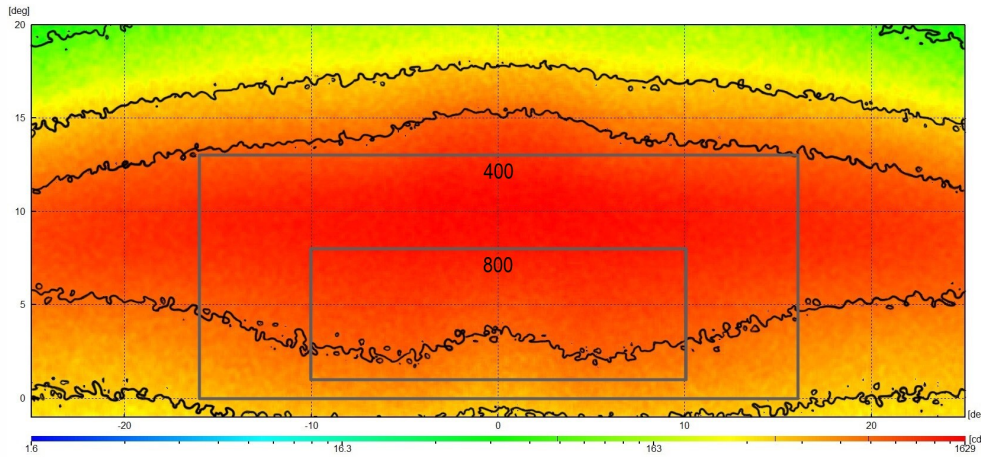

ICAO:




TKH (measured):



Yellow - curved

ICAO A2-14

min. (cd)

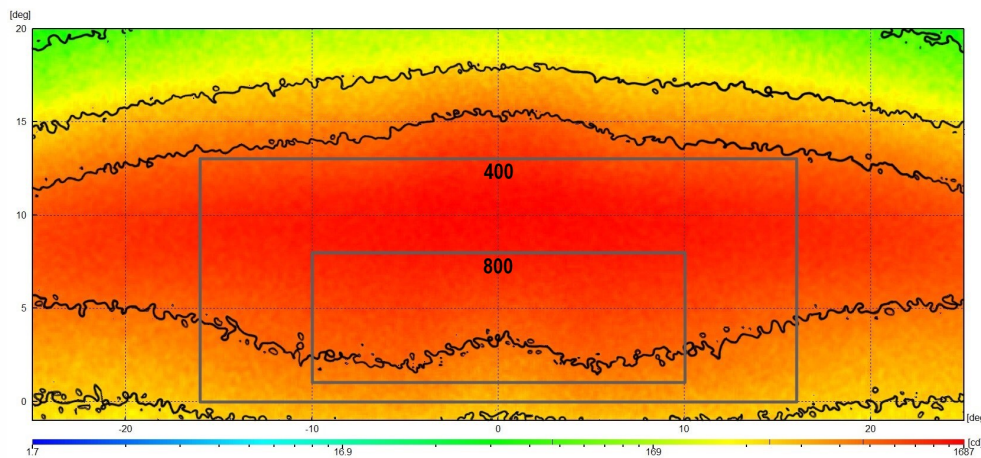

ICAO:




TKH (measured):



Green - straight

ICAO A2-12

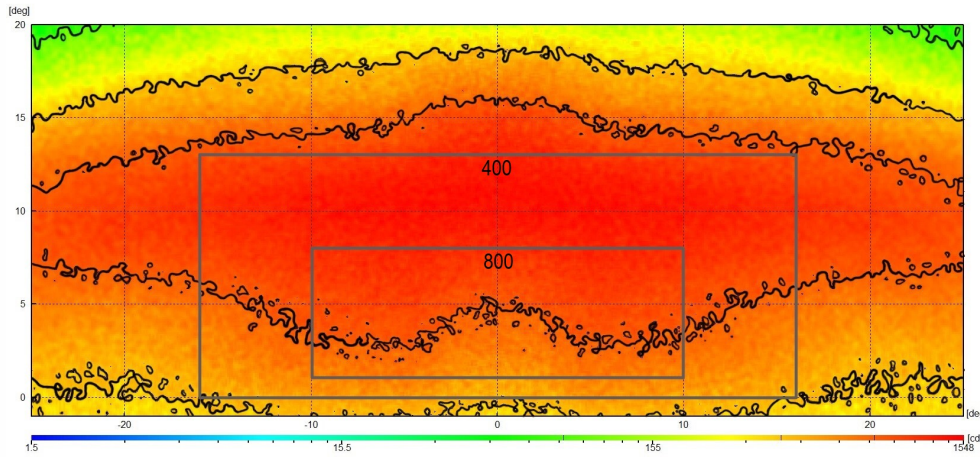

min. (cd)

ICAO:




TKH (measured):



Green - curved

ICAO A2-14

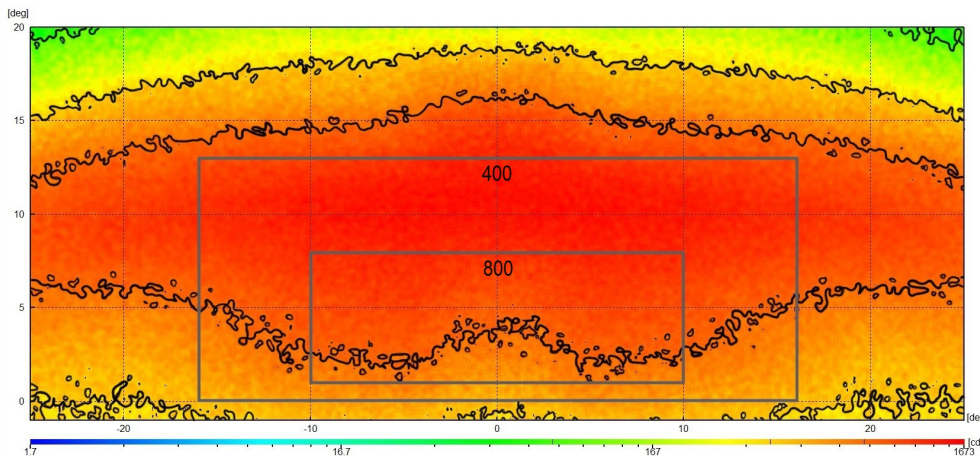

min. (cd)

ICAO:




TKH (measured):





Chromaticities


Areas description according to ICAO Annex 14, Volume I, Edition 8, July 2018

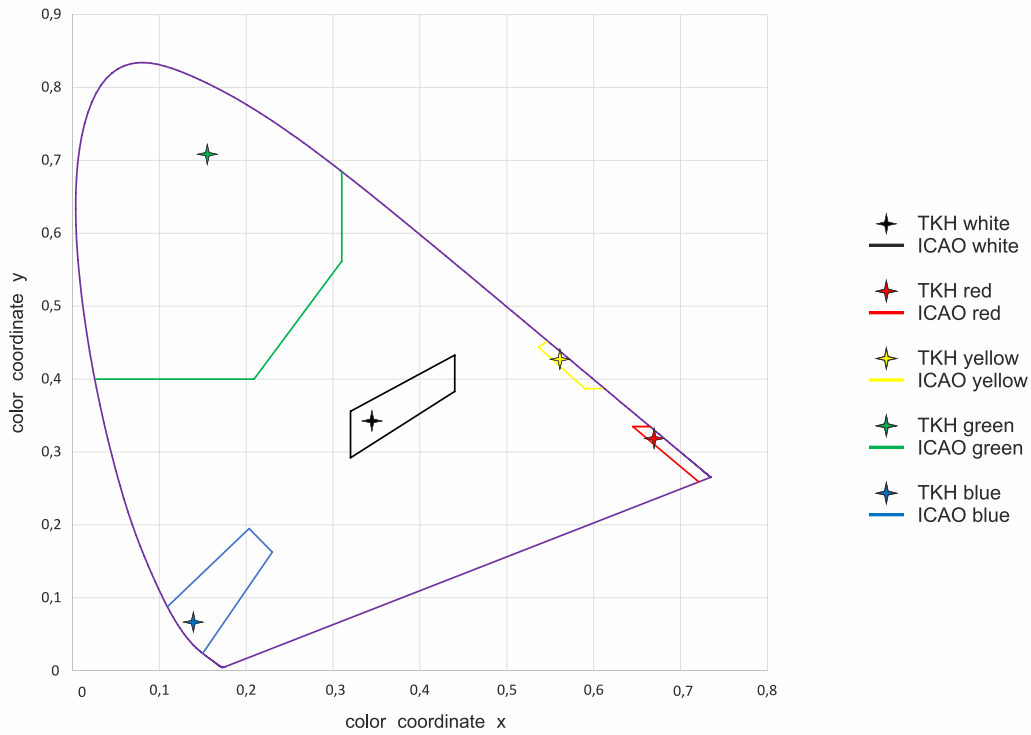


Dimensions

8" fixture

Pos.	Description	Values
1	Total height	112 mm
2	Height LED engine	102.7 mm
3	Height with flange	86.7 mm
4	Height below flange	78.7 mm
5	Flange thickness	16 mm
6	Housing bottom width	111 mm
7	Housing top diameter	153 mm
8	Flange diameter	163.5 mm
9	Cover diameter	201.7 mm
10	Cable diameter	7.9 mm (max)
11	Housing bottom width	125 mm

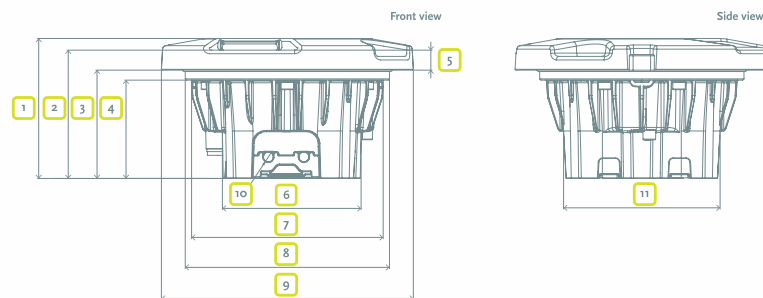

Pos.	Description	Values
12	Diameter of mounting bolt holes (2x)	Ø 10.5 mm
13	Diameter of pilot holes (2x)	Ø 10.5 mm
14	Mounting hole center line	184 mm

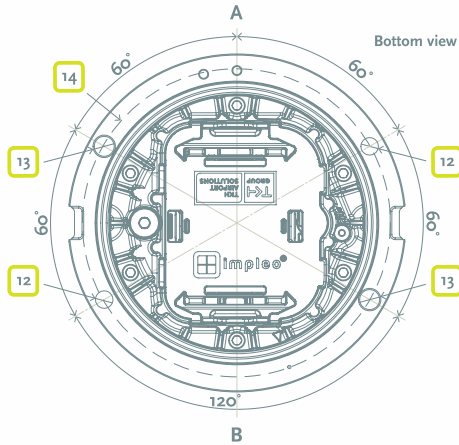

Accessories

- 8" shallow base
- Shallow base installation jig for 8" and 12"

Packing Data

Variant	Dimensions (L x W x H) in mm	Gross weight in kg	Net weight in kg
8" CEDD® Inset Fixture	285 x 285 x 200	4.2	3.7
8" Shallow Base	215 x 215 x 130	2.7	2.5

Ordering Code CEDD® RETL800

Option	Key	Description	RETL800	-	S	-	I	-	3	1	-	G	00	0	00	-	1	-	00	-	0	0	0	0
Version																								
	RETL800	Rapid Exit Taxiway Light 800cd																						
	RETL800	Rapid Exit Taxiway Light Curved 800cd																						
Direction																								
	S	Straight																						
	L	Left Direction																						
	R	Right Direction																						
Regulation																								
	I	ICAO																						
Light Intensity																								
	1	CAT I																						
	2	CAT II																						
	3	CAT III																						
Cover/Size																								
	1	8 Inch Cover																						
	3	8 Inch Flat Cover																						
Color A																								
	G	Green																						
	Y	Yellow																						
Toe-in A																								
	00	No Toe-In																						
Color B																								
	0	Blank																						
Toe-in B																								
	00	No Toe-In																						
Prism																								
	1	Borosilicate Prism																						
	2	Sapphire Prism																						
Cable																								
	00	Not applicable (CEDD® technology)																						
Plug type																								
	0	CEDD® inductive clamp																						
Fail-open																								
	0	Functionality via CEDD® monitoring technology																						
Deicing-Kit																								
	0	Not applicable																						
Special options																								
	0	No Special Options																						



Document Information

Name : 04_CEDD_Rapid_Exit_Taxiway_Light_(RETL800)_03-70064

Version : V1.1

Language : English (Original)

For the latest version of this document see <https://www.tkh-airportsolutions.com/airfield-products/> or scan:





Company profile:

TKH Airport Solutions is an innovator in airfield ground lighting, offering a complete range of LED AGL products. We build upon the know-how from a long and successful tradition of pioneering developments in the AGL and connectivity industry. Being part of the TKH Group, our company can build on a history of more than 90 years in smart connectivity, energy distribution and AGL.

More information:

TKH Airport Solutions
sales@tkh-airportsolutions.com
www.tkh-airportsolutions.com
+31 (0)53 57 414 56

Visiting address:

Elektrostraat 17
7483 PG Haaksbergen
The Netherlands