



Datasheet

CEDD® Touchdown Zone Light (TDZ)



General

CEDD® is a smart, safe and sustainable airfield ground lighting technology. Energy and data transport are combined in a single cable. CEDD® airfield lights receive their power and data by means of induction and can therefore easily and safely be installed or replaced without making electrical contact.

With up to 40% lower energy consumption compared to regular LED AGL systems, CEDD® enables airfields to reduce their impact on the environment. Also, the robust design of the infrastructure is highly suitable for floating 'Follow-the-Greens'. CEDD® AGL provides a solution to face the most challenging future operational demands.

Most of the TKH Airport Solutions inset fixtures are available for regular 6.6-A LED AGL as well as for CEDD® AGL installations. This datasheet covers the specifications of the CEDD® Touchdown Zone Light (TDZ).



Key Features

- 8" outer diameter
- Dust and water resistance: IP68
- Useful lamp life (LED) up to 50,000 hours
- Certification: ICAO
- Power consumption (CEDD® regulated): 18 W
- Ambient temperature: -40 °C (-40 °F) / + 75 °C (+167 °F)
- Internal serial interface for diagnostics and parameterization
- Integrated single lamp control
- Intensity control: 0-100%
- Optional sapphire-coated prism

Photometric data in this datasheet (such as light distributions and chromaticities) is based on ICAO certification. FAA data, if applicable, is available upon request. Contact our sales team for more information.



Variants

- Unidirectional:
 - Straight, Left or Right




Colors

White




Light distribution

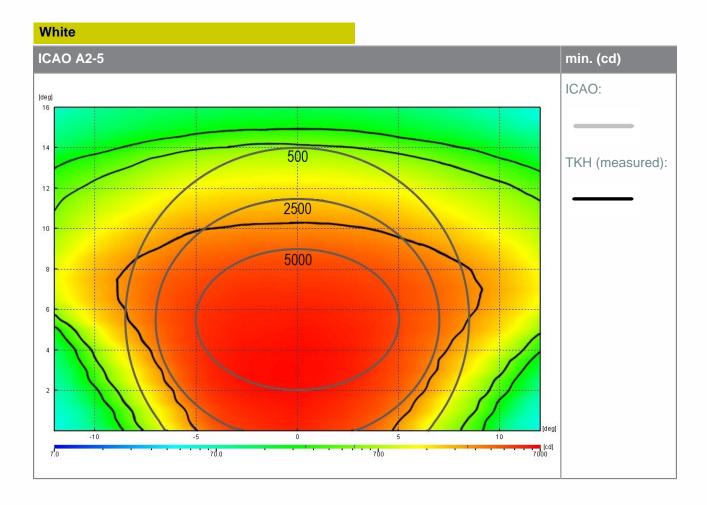

Chromaticities

Areas description according to ICAO Annex 14, Volume I, Edition 8, July 2018

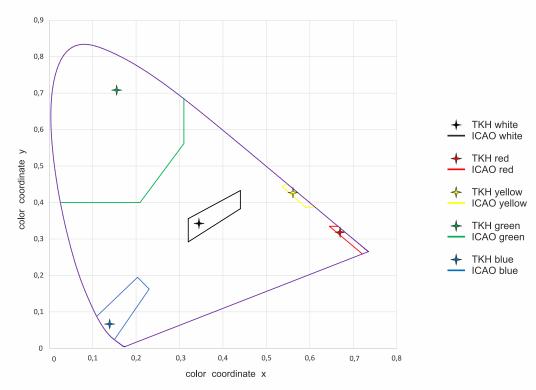





Dimensions


8" fixture

Pos	Description	Values
1	Total height	112 mm
2	Height LED engine	102.7 mm
3	Height with flange	86.7 mm
4	Height below flange	78.7 mm
5	Flange thickness	16 mm
6	Housing bottom width	111 mm
7	Housing top diameter	153 mm
8	Flange diameter	163.5 mm
9	Cover diameter	201.7 mm
10	Cable diameter	7.9 mm (max)
11	Housing bottom width	125 mm





Pos	Description	Values
12	Diameter of mounting bolt holes (2x)	Ø 10.5 mm
13	Diameter of pilot holes (2x)	Ø 10.5 mm
14	Mounting hole centre line	184 mm





Accessories

- 8" shallow base
- Shallow base installation jig for 8" and 12"



Packing Data

Variant	Dimensions (L x W x H) in mm	Gross weight in kg	Net weight in kg
8" CEDD® Inset Fixture	285 x 285 x 200	4.2	3.7
8" Shallow Base	215 x 215 x 130	2.7	2.5



Ordering code CEDD® TDZ

Option	Key	Description	0
Version			
	TDZ	Touch Down Zone Light	
Direction			
	S	Straight	
	L	Left Direction	
	R	Right Direction	
Regulation			
	1	ICAO	
Light Intensity			
Light intensity	1	CATI	
	2	CAT II	
	3	CAT III	
Cover/Size			
	1	8 Inch Cover	
	3	8 Inch Flat Cover	
Color A			
	W	White	
Toe-in A			
100 11174	00	No Toe-In	
Color B			
COIOI B	0	Blank	
Tara in D			
Toe-in B	00	No Toe-In	
	UU .	No rec iii	
Prism			
	1	Borosilicate Prism	
	2	Sapphire Prism	
Cable			
	00	Not applicable (CEDD® technology)	
Plug type			
	0	CEDD® inductive clamp	
Fail-open			
	0	Functionality via CEDD® monitoring technology	
Deicing-Kit			
	0	Not applicable	
Special options	s		
-poolal options	-		



Document Information

Name : 04_CEDD_Touchdown Zone_Light_TDZ_03-70045

Version : V1.2

Language : English (Original)

For the latest version of this document see https://www.tkh-airportsolutions.com/airfield-products/ or scan:





Company profile:

TKH Airport Solutions is an innovator in airfield ground lighting, offering a complete range of LED AGL products. We build upon the know-how from a long and successful tradition of pioneering developments in the AGL and connectivity industry. Being part of the TKH Group, our company can build on a history of more than 90 years in smart connectivity, energy distribution and AGL.

More information:

TKH Airport Solutions sales@tkh-airportsolutions.com www.tkh-airportsolutions.com +31 (0)53 57 414 56

Visiting address:

Elektrostraat 17 7483 PG Haaksberger The Netherlands

